

2.00mm

(0.079'') PITCH CONNECTOR

Wire to Board Connectors

Housing





20017HS-NN

Material

I/NO	DESCRIPTION	MATERIAL
1	HOUSING	P.B.T, UL94V-0

Available Pin


PARTS NO.	A	B	C
20017HS-02	6.0	4.9	2.0
20017HS-03	8.0	6.9	4.0
20017HS-04	10.0	8.9	6.0
20017HS-05	12.0	10.9	8.0
20017HS-06	14.0	12.9	10.0
20017HS-07	16.0	14.9	12.0
20017HS-08	18.0	16.9	14.0
20017HS-09	20.0	18.9	16.0
20017HS-10	22.0	20.9	18.0
20017HS-11	24.0	22.9	20.0
20017HS-12	26.0	24.9	22.0
20017HS-13	28.0	26.9	24.0
20017HS-14	30.0	28.9	26.0
20017HS-15	32.0	30.9	28.0

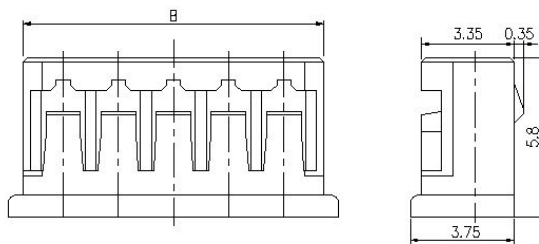

Specification

ITEM	SPEC
Voltage Rating	AC/DC 125V
Current Rating	AC/DC 2A
Operating Temperature	-25°C~+85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC500V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG #24~#30
Applicable P.C.B	-
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-

◆ Applicable Terminal : 20017TS



TERMINAL ASSEMBLY DRAWING

AWG : #24 ~ #30