

2.00mm

(0.079'') PITCH CONNECTOR




Board to Board Connectors

Housing

Straight

SMT Type

Dual Contact

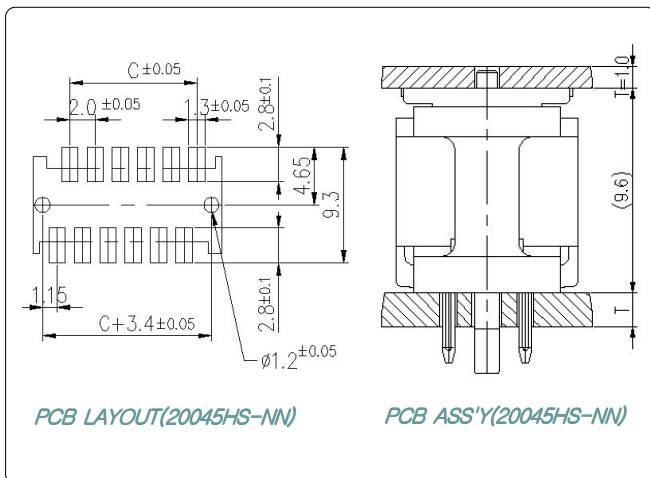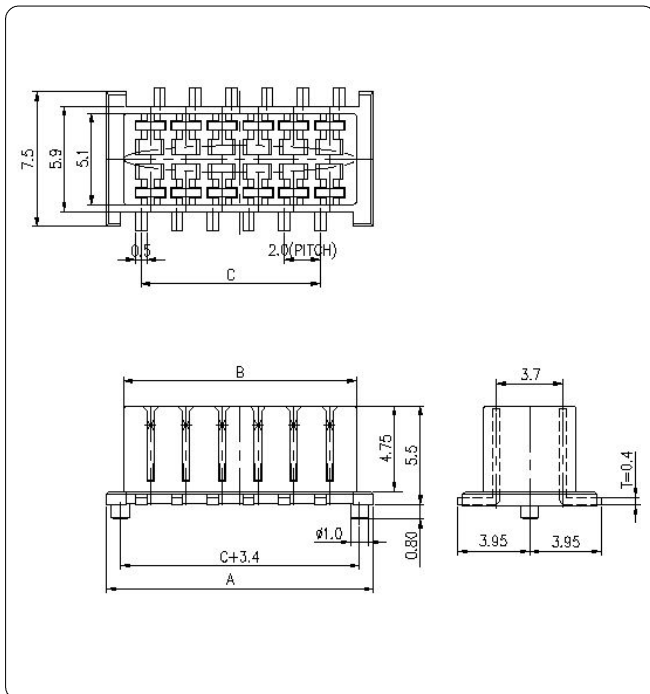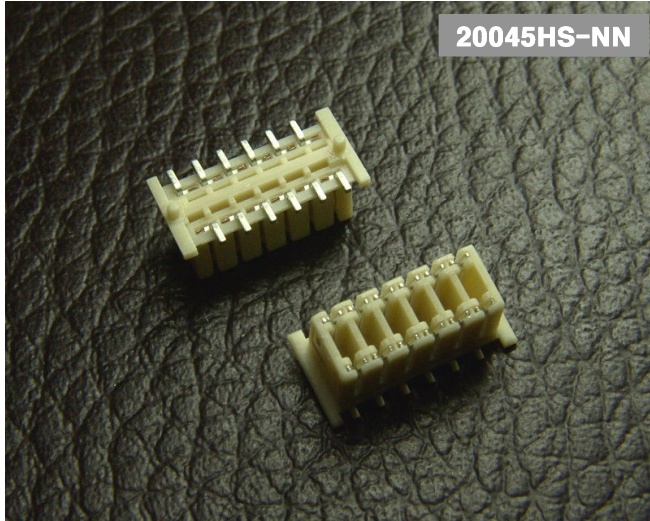

PCB LAYOUT(20045HS-NN)

PCB ASS'Y(20045HS-NN)

Material

I/NO	DESCRIPTION	MATERIAL
1	HOUSING	PA46 or PA6T, UL94V-0
2	TERMINAL	Phosphor Bronze, Tin-plated

Available Pin

PARTS NO.	A	B	C
20045HS-12	14.9	12.95	10.0
20045HS-30	32.9	30.95	28.0

Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 1A
Operating Temperature	-25°C~+85°C
Contact Resistance	30mΩ MAX
Withstanding Voltage	AC500V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	-
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	0.15mm
Crimp Tensile Strength	-
UL FILE NO	-