


2.00mm

(0.079") PITCH CONNECTOR

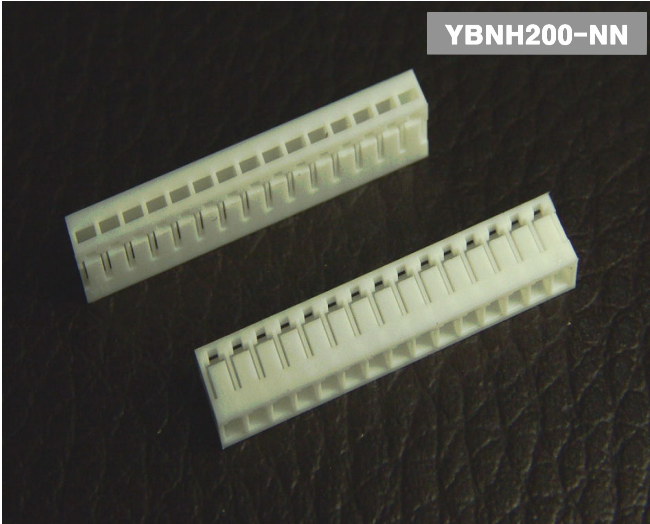

YBNH200-NN

Material


I/NO	DESCRIPTION	MATERIAL
1	HOUSING	PA66, UL94V-0

**Board - In
Connectors**

Housing

Available Pin

PARTS NO.	A	B	C
YBNH200-02	4.5	3.3	5.7
YBNH200-03	6.5	3.3	5.7
YBNH200-04	8.5	3.3	5.7
YBNH200-05	10.5	3.3	5.7
YBNH200-06	12.5	3.3	5.7
YBNH200-07	14.5	3.3	5.7
YBNH200-08	16.5	3.3	5.7
YBNH200-09	18.5	3.3	5.7
YBNH200-10	20.5	3.3	5.7
YBNH200-11	22.5	3.3	5.7
YBNH200-12	24.5	3.3	5.7
YBNH200-13	26.5	3.3	5.7
YBNH200-14	28.5	3.3	5.7
YBNH200-15	30.5	3.3	5.7

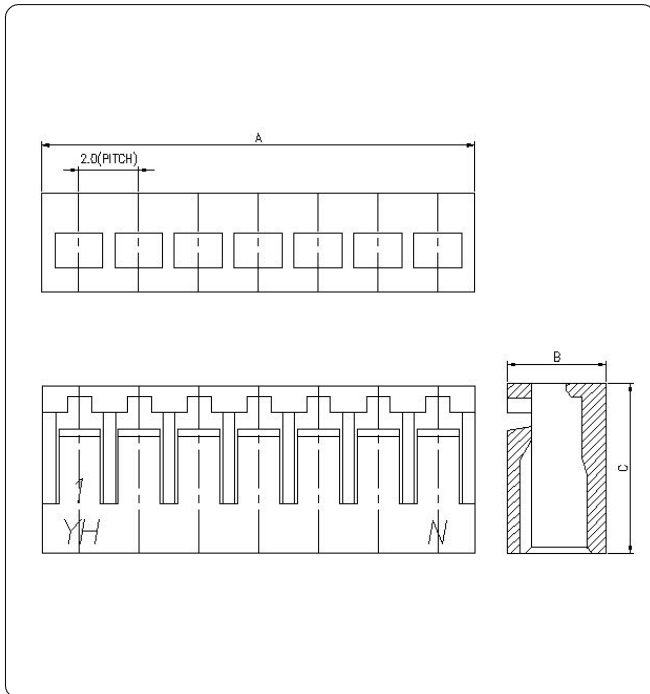

Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 2A
Operating Temperature	-25°C~+85°C
Contact Resistance	-
Withstanding Voltage	AC1000V/1min
Insulation Resistance	1000MΩ MIN
Applicable Wire	AWG #26~#30
Applicable P.C.B	1.2~1.6mm
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-

◆ Applicable Terminal : YBST200

